

JetCon 1302

2-Port Fast Ethernet to Fiber Media Converter



- Two 10/100 TX ports to One 100FX port media converter
- Supports Auto MDI/MDI-X, Auto Negotiation
- Supports Multi-mode 2KM, Single-mode 30KM
- Fault Relay Output for port alarm
- Dual modes for power input, AC18-27V/DC18-32V
- Compact Aluminum case with IP31 grade protection
- Supports AC1.5KV Hi-Pot isolation protection
- Operating temperature -10~70°C (-40~70°C wide operating temperature model available by request)



AC18-27V
DC18-32V

Alarm

-10~70°C

Industrial
Intelligent
NMS

Rackmount
PoE Plus
Switch

Industrial
PoE Plus
Switch

Industrial
12-24V
PoE Switch

Industrial
PoE Switch

Rackmount
L3/L2 Switch

Gigabit
Managed
Switch

Managed
Ethernet
Switch

Entry-level
Switch

Wireless
Outdoor AP

Embedded
PoE/Router
Computer
(LINUX)

Industrial
Communication
Computer
(WIN/LINUX)

Ethernet/PoE/
Serial Board

Ethernet
I/O Server

**Media
Converter**

Serial Device
Server

SFP Module


Din Rail
Power Supply

Overview

JetCon 1302 is not only a compact 2-port RJ45 to fiber media converter, but also a slim 3-port switch which is an ideal model that would physically fit in a network environment with limited space. The feature of fault relay alarm aims to inform you whenever there is any port link down. Just move up the DIP switch, and the fault relay alarm will start functioning! Single-mode and Multi-mode fiber optic ports meet your needs for long distance transmission of up to 30KM.

JetCon 1302 can be easily wall mounted as well as be mounted directly on DIN rail. AC 18V~27V or DC 18V~32V is available for different operating environments. With IP 31 rigid and compact aluminum case, 1.5KV Hi-Pot isolation protection, CE/FCC regulatory approvals, and 5-year global warranty, JetCon 1302 series are your reliable choices for hazardous applications.

Dimensions (Unit = mm)

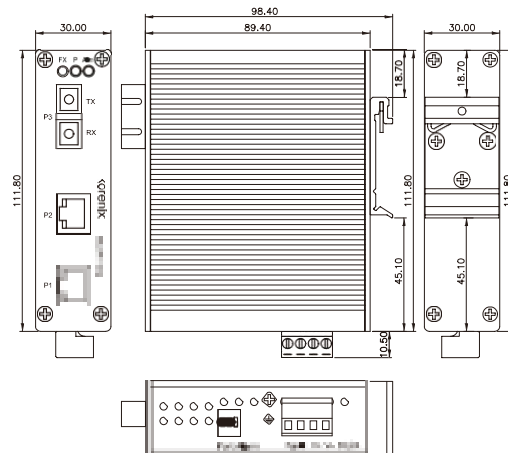

Specification

Technology

Standard:

IEEE802.3 10Base-T, IEEE802.3u 100Base-TX
IEEE802.3u 100Base-FX, IEEE802.3x flow control

Switch Technology: Store and forward technology and with 3.2Gbps switch bandwidth

Interface

Number of Ports: 2 x 10/100 TX with Auto MDI/MDI-X, Auto-Negotiation functions
1 x 100Base-FX

Connectors: 10/100 Base-TX: RJ-45

100Base-FX: Duplex SC

Power/Relay: 4-pin terminal block

Cables:

RJ-45 connector: supports Cat.3, Cat.4, Cat.5 unshielded twisted pair or shielded twisted pair cable. The link distance is maximum 100 meters

Fiber Transceiver:

Fiber Connector: SC

Multi-mode fiber: 50/125um or 62.5/125um, max. distance 2KM

Single-mode fiber: 8/125um, 9/125um or 10/125 um, max. distance 30KM

JetCon1302-m, Multi-mode: 2KM max. distance

Link Distance: 2KM (Max.)

Wave-length: 1310nm

Min Tx Power:-20dBm

Max Tx Power:-14dBm

Min Rx Sensitivity:0dBm

Max Rx Sensitivity:-31dBm

Link budget:11dBm

JetCon1302-s, Single-mode: 30KM max. distance

Link Distance: 30KM (Max.)

Wave-length:1310nm

Min Tx Power:-15dBm

Max Tx Power:-8dBm

Min Rx Sensitivity:0dBm

Max Rx Sensitivity:-34dBm

Link budget:19dBm

Port Alarm DIP Switch:

DIP 1~3: Enable or disable port link down alarm for copper port 1/2, fiber port 3

On: Enable port link down alarm

Off: Disable port link down alarm

Diagnostic LED: System: Power (green), Fault (red)

RJ-45 port: 100Mbps Link (green on)/Activity(green blinking)

10Mbps Link (yellow on)/Activity(yellow blinking)

Fiber port: Link/Activity(green on / green blinking)

Power Requirements

System Power: 2 pins terminal block for power input

DC 24V(18~32V)with reverse polarity protection

Power Consumption: 4.8Watts @ DC 24V

Mechanical

Installation: DIN-Rail mount

Casing: IP31 protection, aluminum case

Dimensions:

111.8mm(H) x 30mm (W) x 98.2mm (D)

(with DIN rail clip)

111.8mm(H) x 30mm (W) x 89.4mm (D)

(without DIN rail clip)

Weight: 374g with package

292g without package

Environmental

Operating Temperature: -10 ~ 70°C

(JetCon 1302-w: -40~70°C)

Operating Humidity: 0% ~ 95% (Non-condensing)

Storage Temperature: -40 ~ 80°C

Storage Humidity: 0%~ 95% non-condensing

Hi-Pot: AC1.5KV on port to port and port to power

Regulatory Approvals

EMI: FCC Class A, CE/EN55022 Class A

EMC Immunity Interface:

EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5

EN61000-4-6, EN61000-4-8, EN61000-4-11

Shock: IEC60068-2-27

Free Fall: IEC60068-2-32

Vibration: IEC60068-2-6

MTBF: 632,171 Hours, MIL-HDBK-217F GB standard

Warranty: 5 years

Ordering Information

JetCon 1302-m Industrial 2-port Fast Ethernet to Fiber Media Converter, SC, Multi-mode/2KM

JetCon 1302-s Industrial 2-port Fast Ethernet to Fiber Media Converter, SC, Single-mode/30KM

Includes:

JetCon 1302-m / 1302-s

■ Quick Installation Guide

■